



**ATEM 5**  
433,92 MHz



Conforme R&TTE, utilisable dans la C.E.E.  
Conforme R&TTE, utilizzabile nei paesi C.E.E.  
Conforme R&TTE, usado en de la CEE  
Conforme R&TTE, utilizável na C.E.E.  
Compliant with R&TTE, usable in the EEC.  
Conform product R&TTE, te gebruiken in de EEG.  
Entspricht der R&TTE, in der EWG verwendbar.

### WEATEM 5 (750530)

Type - Typ - Tipo : ATEM5

- Télécommande 4 canaux compatible avec tous les automatismes de la gamme :
- Telecomando 4 canali, compatibile con tutte le motorizzazioni della gamma:
- Mando a distancia 4 canales, compatible con todos los automatismos de la gama:
- Telecomando 4 canais, compatível com todos os automatismos de gama:
- 4-channel remote control, compatible with all the automatismos of the range:
- Afstandsbediening 4 kanalen, overeenstemmend met alle automatismen van het scala:
- 4-Kanal-Handsender, verwendbar mit allen Modellen von Tor-und Garage-Antrieb:


### WEAT 2, WEAT 2N, CARA, BORA, VERA, GARA

[www.cfi-extel.com](http://www.cfi-extel.com)



F - IT - ES - PT  
GB - NL - D

- **France** : Hotline : 0 892 350 069 (0,337 € ttc/min)
- **Italia** : Assistenza Tecnica : +39 02 96488273  
assistenza@cfi-extel.com
- **España** : Asistencia técnica : 902 109 819  
sat-hotline@cfi-extel.com
- **Portugal** : Serviço de apoio ao cliente :  
707 201 138

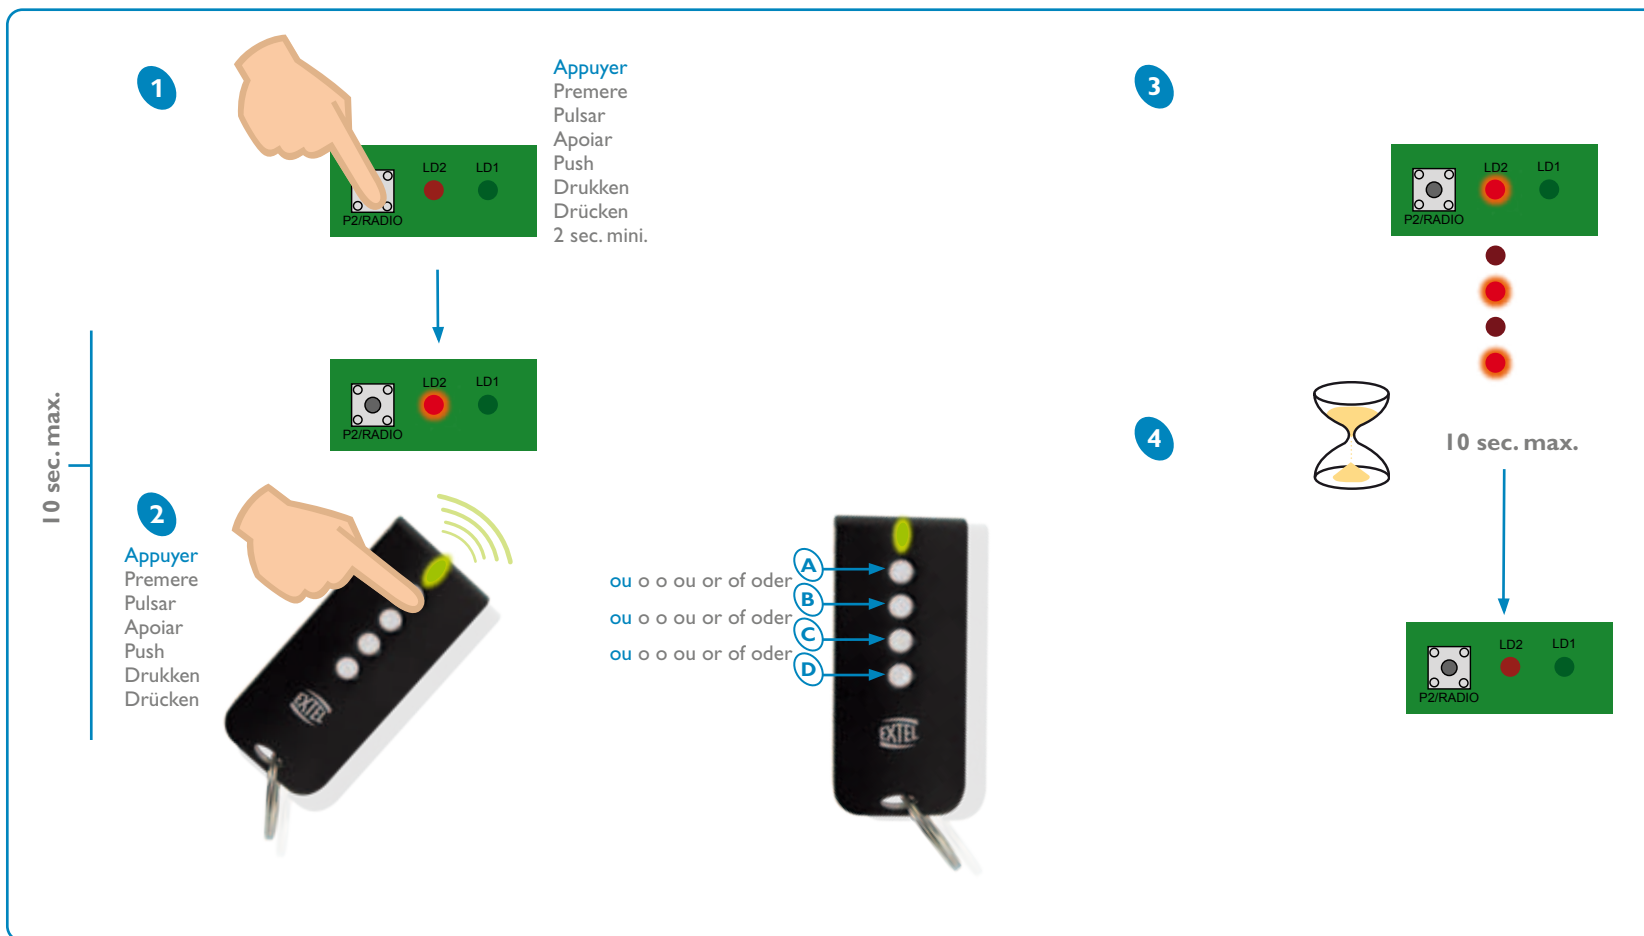

Portée 30m, en champ libre  
Portata 30m, in campo libero  
Alcance 30m, en campo libre  
Range 30m, in campo libre  
Bereik 30m, bij vrije ruimte  
Reichweite 30m, auf freiem Feld



**1 x CR 2032 (3V)**  
Fournie  
Fornita  
Suministrada  
Incluida  
Supplied  
Bijgeleverd  
Mitgeliefert

**CFI-EXTEL France**  
Z.I de Fétan  
01600 Trévoux